


meri BioSulph Biological Biogas Desulphurization

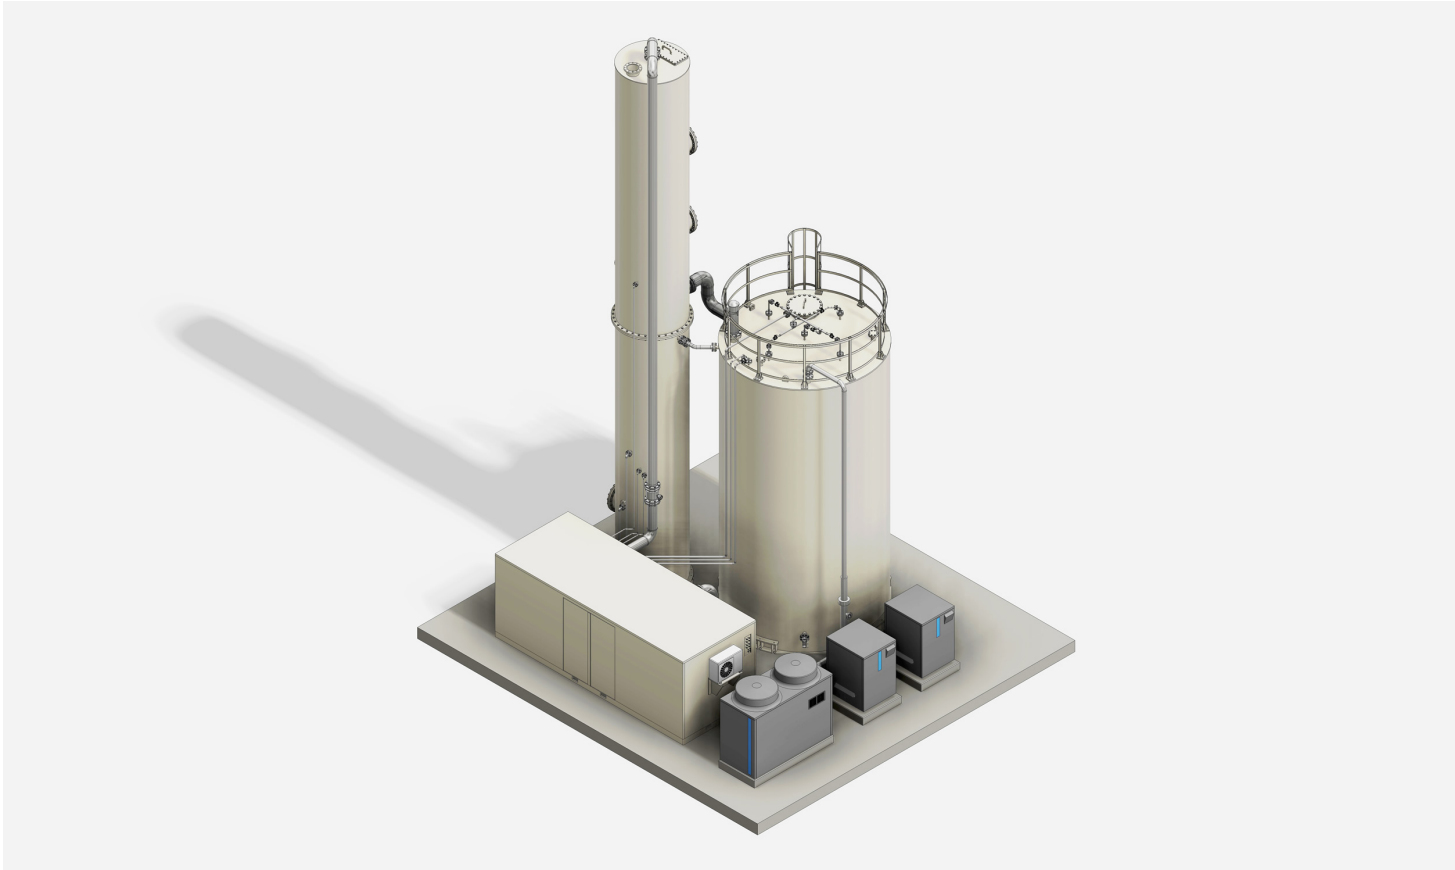

meri BioSulph Biological Biogas Desulphurization

Technology

Anaerobic Reactors are today state of the art in effluent treatment for Recycled paper Mills and other Industrial Productions with high Effluent Loads (e.g. Breweries, Food Production and others). Key benefit of Anaerobic Waste Water Treatment is the Production of Biogas.

Raw biogas from Anaerobic Reactors in Effluent Treatment contains not only methane (CH₄) and CO₂, but also hydrogen sulfide (H₂S).

H₂S is toxic, corrosive, and harmful to gas engines/pipelines, therefore, it must be removed before using or upgrading biogas.

Biological methods are preferred over chemical scrubbing because they are cost-effective and environmentally friendly.


The Process comprises 2 Process Stages:

Washing in which the raw biogas is counter washed through a sprayed liquid phase (recycled water or a weakly alkaline solution). H₂S is much more soluble in water than CH₄ or CO₂, so it preferentially dissolves (H₂S (gas) → H₂S (dissolved)) in the washing liquid (In slightly alkaline conditions, dissolved H₂S can partly dissociate), as a result the Biogas leaving the scrubber has significantly reduced H₂S content.


The washing liquid now contains dissolved sulfides (H₂S, HS⁻, sometimes S²⁻).

The sulfide-loaded washing liquid is sent to an aerobic bioreactor containing sulfur-oxidising bacteria (SOB), which uses oxygen as an electron acceptor to oxidise sulfides.

a) Partial oxidation to elemental sulfur (S⁰):



b) Further oxidation to sulfate (SO₄²⁻):



Depending on process control (oxygen availability, pH), the system can be tuned to favor elemental sulfur recovery (valuable product) or full sulfate mineralization

The washing liquid is regenerated (sulfides removed), so it can be reused for the next biogas washing cycle, and the end products are elemental sulfur (solid, can be harvested) or sulfate in solution (may be discharged with wastewater).

Features


- Compact “all in one – 2 stage Desulfurization Process” with Biogas Scrubbing and sulfur oxidizing by biological bacteria in aerobic bioreactor.
- Modular design allows adaptation to different Process Characteristics and Capacities
- High Efficient Gas Scrubbing according to counterflow principal
- Efficient Compact Aerobic Bioreactor, easy to control, to reach elemental sulfur recovery (valuable product) or full sulfate mineralization.

Why to buy

- Compact pre-installed meri BioSulph Biological Biogas Desulphurization with perfect integration to meri R2s, E2E or other Anaerobic Reactors.



Typical Configuration of a Biogas Line

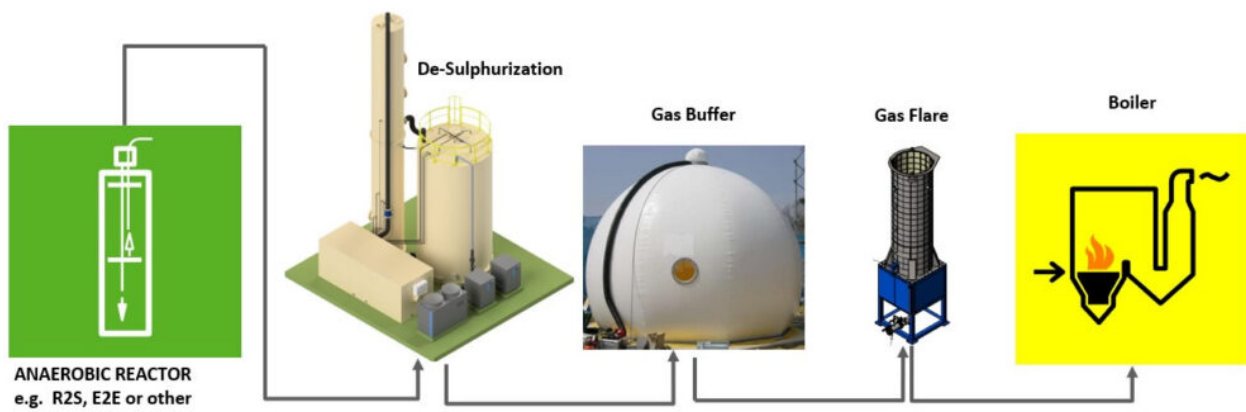

Typical & Proven Process

- Desulphurization for Biogas Streams out of Anaerobic Waste Water Treatment with R2s, E2E or other Anaerobic Reactors

See the following Products as well

- R2S Anaerobic Reactor
- E2E Anaerobic Reactor Series
- MERI Flare and Gas Buffers
- Circular Sedimentation Tank
- LimeTrap
- Tauro TAL
- DeltaPurge
- Vulcano
- GyroSand

**Meri Environmental Solutions GmbH**

Bodenseestr. 113
81243 Munich, Germany
Tel. +49 89 59 33 44
info@meri.de

Voith Meri Environmental Solutions, Inc.

2620 E. Glendale Avenue
P.O. Box 1262
Appleton WI 54911-1262, USA
Tel. +1 920 734-8485
info@meriusa.com

Meri Sistemas e Tecnologia Ltda.

R. Friedrich von Voith, 825
São Paulo – SP – 02995-000, Brasil
Tel. +55 11 3944-6644
meribrasil@meribrasil.com.br

**Meri Environmental Technology
(Kunshan) Co.,Ltd.**

Room 203, No.5, Qinghua Tuspark
Zuchongzhi Road 1666
Kunshan, Jiangsu PRC, China
Tel. +86 51 28 68 90 834
info@meri.cn

www.meri.de



Note: All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.