


## MERI CONTAINER STATION R

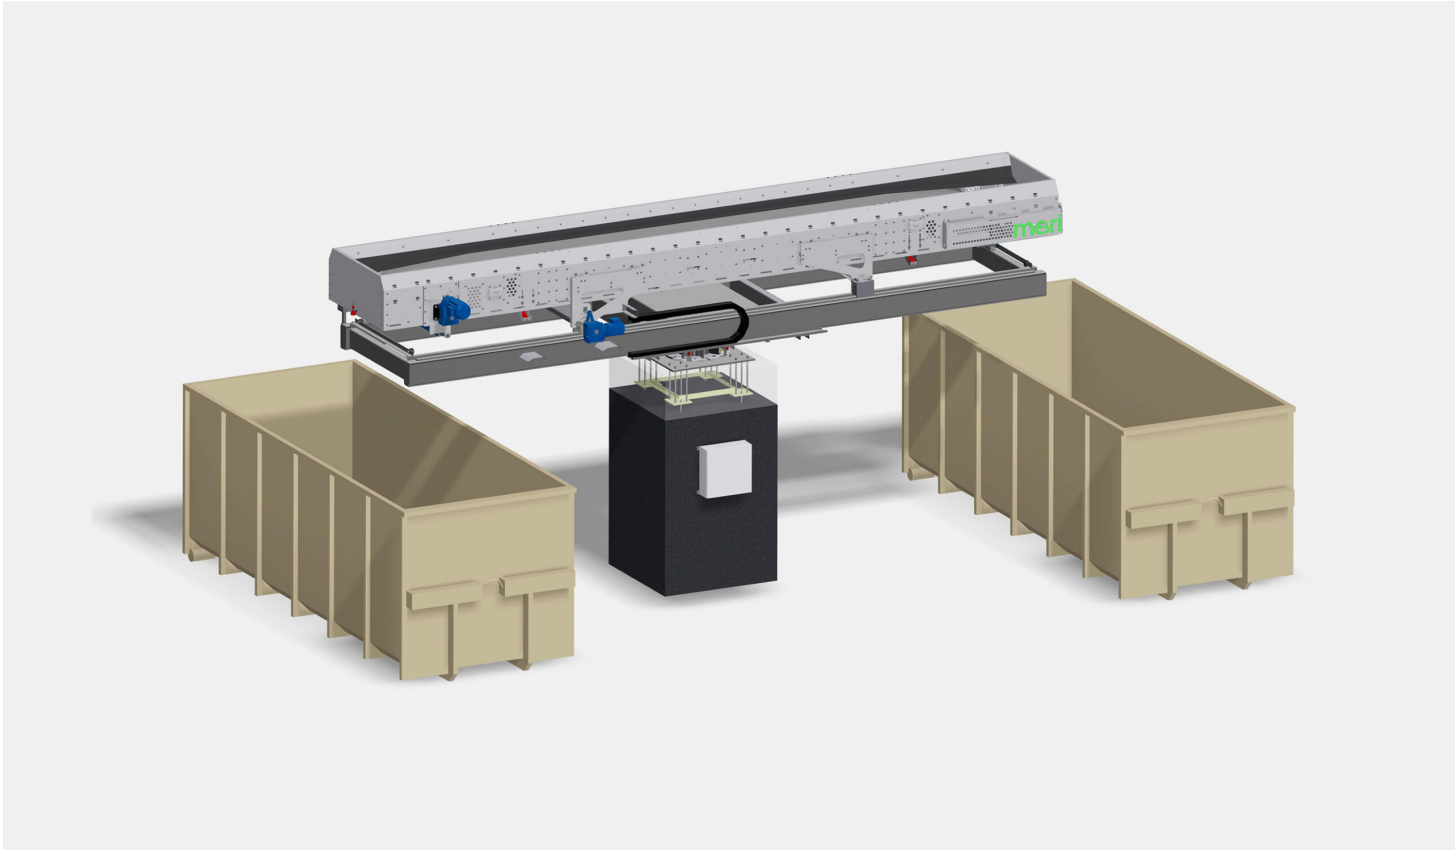

# MERI CONTAINER STATION R

## Technology

The Meri Container Station R is suitable to fill and distribute un- or pre-treated Rejects & Sludges into commercial or custom-made Containers or bunkers. In consideration of the space conditions, the daily reject amount and other requirements, it is possible to fill fully automatically 2 – 4 containers. The Meri Container- Station R uses MBX meri belt conveyor modules for material transport. The Meri Container- Station R is a well-established reliable equipment, proven in many applications. Up to 5 discharge points per container are possible in strictly order one after the other as well a “special”- filling shop with manual pre- selected independent filling points. The fully automatic sliding- and rotating movements, which are initialized by high- detection monitoring are allowing also to recognise a missing container and to aim for the next one.

## Features

- Stepless position change in lateral direction by 4 flanged rail wheels and 1 gear motor fixed underneath the frame of a MBX conveyor
- Turn movement by central bearing to carry the lateral sliding frame and belt conveyor with gear wheel, which is turned by a drive pinion including gear motor.
- Height detection to monitor filling level and recognise missing containers
- Automatic farther movement to next available filling point under position replication by lateral, & circular position measurement
- Variable speed with std. SEW gearmotors for conveyor, lateral- and circular- movement for optimum power consumption reliable in 24/7 continuous operation

## Why to buy

- Long term experienced distribution technology in many container stations worldwide
- Precise distribution onto up to 5 points per container to use storage capacity most efficiently.
- Reliable container filling under keeping of clean- environment
- Distribution of large amounts by generous free belt width & vat moulded section design. (see also MBX- belt conveyor).
- Fully automatic system including filling monitoring & detection of missing containers.
- Several filling sequences (Standard- & manual- pre- selected special job) possible
- Easy maintenance and erection due to quick exchangeable doctor blades, sliding bars, lower return idlers, clamped side rubbers, perforated side covers and modular design


## Typical & Proven Process

- Distribution of Light weight Reject from Pulping, wet or dry.
- Fibrous rejects/sludges, wet or dry.
- Transportation of bulk reject, pulper rope in certain length or pre- shredded.

## See as well the following Products

- Container- Stations MCS- lateral
- MBX- belt- conveyor
- MSC – Spiral conveyors
- Pre- Dewatered trash/reject from TSX-SCREENEX
- LION shredders
- COMPAX CFX- R & F
- MINIPRESS MPX
- Pre- thickened residuals from Elephant- Filter, Sediphant & Screenex
- RSP- screw press sludge

## Specifications

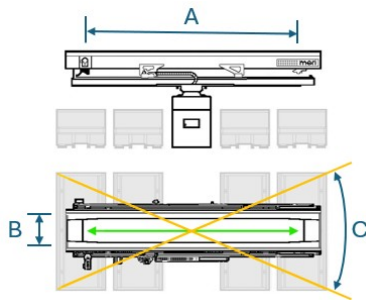

	Dimensions
Belt Length (A) [mm]	Min. 5500 – Max. 7500
Belt Width (B) [mm]	800 / 1000 / 1200
Angel of rotation (C) [°]	+30 to -30
Amount of container	Up to 4

**Meri Environmental Solutions GmbH**

Bodenseestr. 113  
81243 Munich, Germany  
Tel. +49 89 59 33 44  
info@meri.de

**Voith Meri Environmental Solutions, Inc.**

2620 E. Glendale Avenue  
P.O. Box 1262  
Appleton WI 54911-1262, USA  
Tel. +1 920 734-8485  
info@meriusa.com

**Meri Sistemas e Tecnologia Ltda.**

R. Friedrich von Voith, 825  
São Paulo – SP – 02995-000, Brasil  
Tel. +55 11 3944-6644  
meribrasil@meribrasil.com.br

**Meri Environmental Technology  
(Kunshan) Co.,Ltd.**

Room 203, No.5, Qinghua Tuspark  
Zuchongzhi Road 1666  
Kunshan, Jiangsu PRC, China  
Tel. +86 51 28 68 90 834  
info@meri.cn

[www.meri.de](http://www.meri.de)



**Note:** All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.