


TAL TAURO – Dissolved Air Flotation Clarifier

The TAURO is designed for compact installation with high performance separation

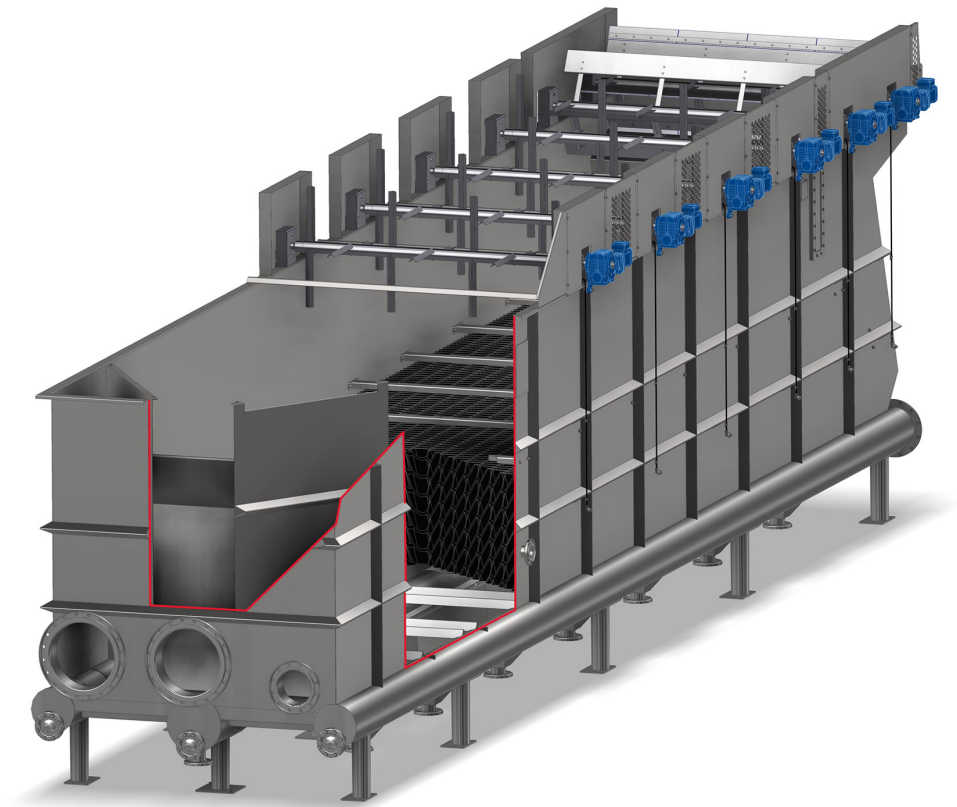

TAL TAURO – Dissolved Air Flotation Clarifier

Technology

The TAURO is a rectangular Dissolved Air Flotation system, which features lamella technology for a highly effective flotation area. The TAURO combines high-performance DAF technology with a compact tank design. The rectangular shape and inclined lamella modules provide the clarifier tank with a small footprint. This makes the TAURO unit suitable for tight installation space requirements.

Features

- High performance Dissolved Air Flotation clarifier combining free flotation and lamella separation in one unit.
- Low installation space requirement.
- Increased effective flotation area in respect to the installation area.
- Simple piping to inlet/outlet at the tank.
- Improved sludge dewatering through paddle/dewatering ramp combination.
- Fully modular design to fulfill any layout requirement.
- Basic operation and high process flexibility.
- Universal Dissolving System with a state-of-the-art air dissolving technology.

Why to buy

- High performance Dissolved Air Flotation clarifier combining free flotation and lamella separation in one unit.
- Increased effective flotation area in respect to the installation area.
- Simple piping to inlet/outlet at the tank.
- Improved sludge dewatering through paddle / dewatering ramp combination.
- Unique lamella design for maximized separation surface and minimized chemical consumption.
- Ability to handle high TSS loading, without efficiency reduction.
- Minimized installation costs.




Typical & Proven Process Applications

- Save-all applications for fiber recovery in paper machine water loops.
- Filtrate and loop clarification for removal of colloidal dissolved contaminants and micro stickies to improve operation ability and product quality.
- White water treatment and washer filtrate clarification
- Filtrate thickening for removal of fines and ash
- Closing of water loops and reduction of freshwater consumption
- Clarification of primary and secondary mill effluent
- Removal of anionic trash and pitch
- Thickening of biologically activated sludge in effluent treatment plants
- Other industrial applications for food, oil, or chemical industry- please ask for details

See as well the Following Products

- Universal Dissolving system
- Circular Sedimentation Tank
- Elephant
- Dinoscreen
- LimeTrap
- DeltaPurge
- Vulcano
- GyroSand

Specifications

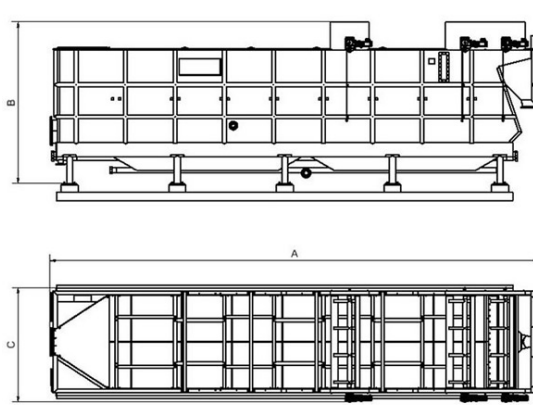

Model	Hydraulic Throughput [m ³ /h]	Length (A) [mm]	Height (B) [mm]	Width (C) [mm]
TAL 4.1	0-140	5200	3700	2400
TAL 6.1	140-240	6700	3700	2400
TAL 8.1	240-320	8200	3700	2400
TAL 9.1	320-400	9700	3700	2400
TAL 11.1	400-480	11200	3700	2400
TAL 12.1	480-560	12700	3700	2400
TAL 14.1	560-700	16000	3700	2400
TAL 8.2	560-670	8200	3700	4800
TAL 9.2	670-840	9700	3700	4800
TAL 11.2	840-1000	11200	3700	4800
TAL 12.2	1000-1150	12700	3700	4800
TAL 14.2	1150-1300	16000	3700	4800

**Meri Environmental Solutions GmbH**

Bodenseestr. 113
81243 Munich, Germany
Tel. +49 89 59 33 44
info@meri.de

Voith Meri Environmental Solutions, Inc.

2620 E. Glendale Avenue
P.O. Box 1262
Appleton WI 54911-1262, USA
Tel. +1 920 734-8485
info@meriusa.com

Meri Sistemas e Tecnologia Ltda.

R. Friedrich von Voith, 825
São Paulo – SP – 02995-000, Brasil
Tel. +55 11 3944-6644
meribrasil@meribrasil.com.br

**Meri Environmental Technology
(Kunshan) Co., Ltd.**

Room 203, No.5, Qinghua Tuspark
Zuchongzhi Road 1666
Kunshan, Jiangsu PRC, China
Tel. +86 51 28 68 90 834
info@meri.cn

www.meri.de



Note: All product-related data and information in this publication shall serve for information purposes only. They shall not be interpreted or intended to represent any kind of warranty or guarantee. The only legally binding statements are those contained solely within our quotations. Errors and omissions excepted. Technical data are subject to change.